


DUO

BREAK
MACHINERY

Recycling
beyond
together



Automatic self-cleaning filtering system
with constant pressure output

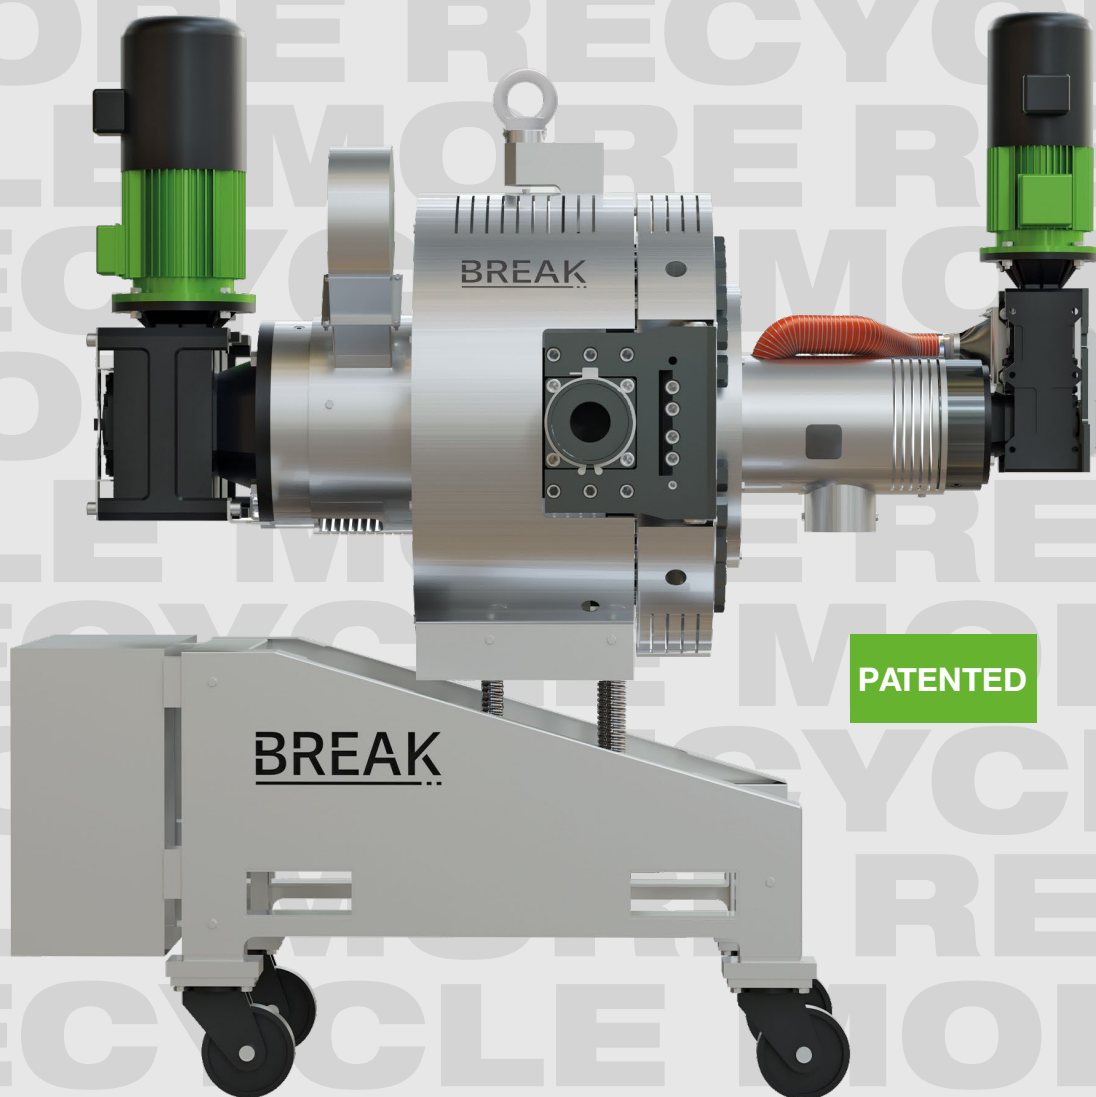

English



BreakMachinery.com/DUO

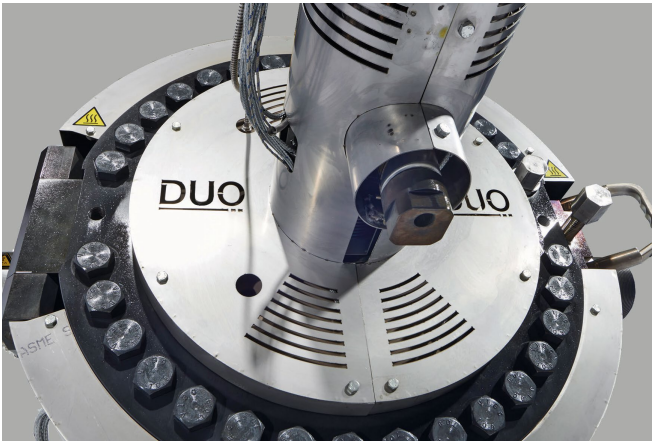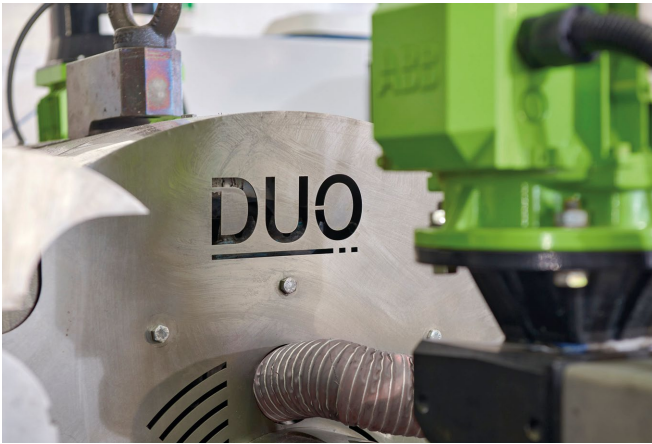

The filter that adapts to every need

DUO can be installed on both regeneration and extrusion lines, and responds perfectly to the constant pressure requirements typical of certain production lines, such as in the production of thin films and sheets.

It is suitable for filtering both poorly contaminated material, such as post-industrial, and highly contaminated material, such as post-consumer.

Finally, thanks to its technical characteristics, it can achieve very low filtrations (down to 60 microns), making it possible to obtain a final product suitable for the different market demands.





Mod. DUO 1750 DS



Mod. DUO 3500 DS

Constant pressure self-cleaning filtering system


It is a double screen system, operating at constant pressure for high process stability, which allows **maximum productivity** while ensuring high product quality.

The geometry of the **scraper disc** and the innovative **screw discharge system** allow **contamination to be removed in a rapid and controlled manner, and reduce the quantity of waste.**

DUO	Filtering surface area [cm ²]	Heating zones	Max pressure [bar]	Maxfi flow rate [kg/h] ¹	Filtration [µm]
1400 DS	1418	7	350	2000	60-2000
1750 DS	1756	7	350	3000	60-2000
1750 DS Auto	1756	7	350	3000	60-2000
2800 DS	2847	7	350	5000	60-2000
3500 DS	3515	7	350	6000	60-2000
5600 DS Twin	5694	14	350	10.000	60-2000
7000 DS Twin	7030	14	350	12.000	60-2000

(1) The flow rate depends on various factors: melt viscosity, filtration finess, type and percentage of contaminant, production line.

Advantages

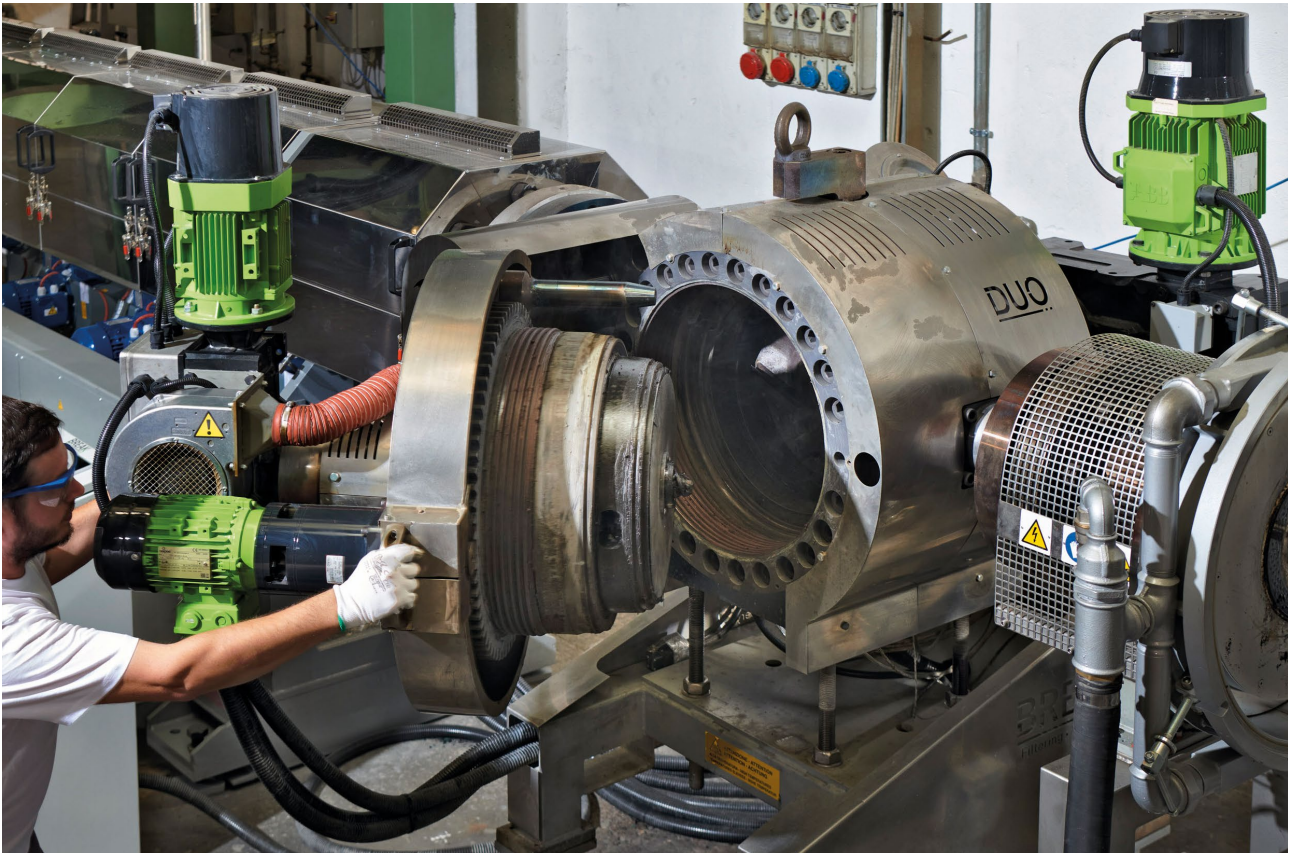

Mod. DUO 1750 DS Auto



Savings

The efficiency of the cleaning system in continuous mode extends the life of the laser screen, resulting in less consumable purchases.



Productivity

The constant-pressure continuous filtration system maximises line productivity by keeping the melt passage area free of contamination at all times.



Labour

The innovative design reduces cleaning and replacement time for filters and blades.

The presence of the operator is significantly reduced.

Routine and extraordinary maintenance operations are also simple, fast and can be carried out directly at the customer's production site.



Minimum waste

The screw rotates independently of the scraper disc. In this way, waste can be minimised depending on contamination, and disposal costs are reduced.


This configuration makes it possible to process even highly contaminated materials.

Advantages



Continuous filtration, constant pressure

The operating principle of **DUO** guarantees the possibility of working in continuous mode and at constant pressure.



Dual screen

DUO uses two filters. This makes it possible to reduce the size of the filtration chamber and to have large screen surfaces in order to increase the production volume.




Cleaning efficiency

The special geometry of the independent, 6-blade rotating scraper disc enables excellent cleaning even at low rotational speeds. Its design prevents filtered contaminants from re-entering the melt.



Percentage of impurities

DUO can be used to filter materials with high percentages of impurities (up to 15% by weight, depending on the type of pollutant).



Single independent discharge screw


Contamination collected by both screen surfaces is discharged by means of a single independent screw, which is capable of conveying the contamination to the outside.



Customisation

DUO is customisable and adaptable to the customer's needs: the configuration includes an adjustable height, a lid that can be opened to the right or left, positioning of the switchboard defined according to the available space and connection to any extrusion line, thanks to custom-made flanges.

DUO: details

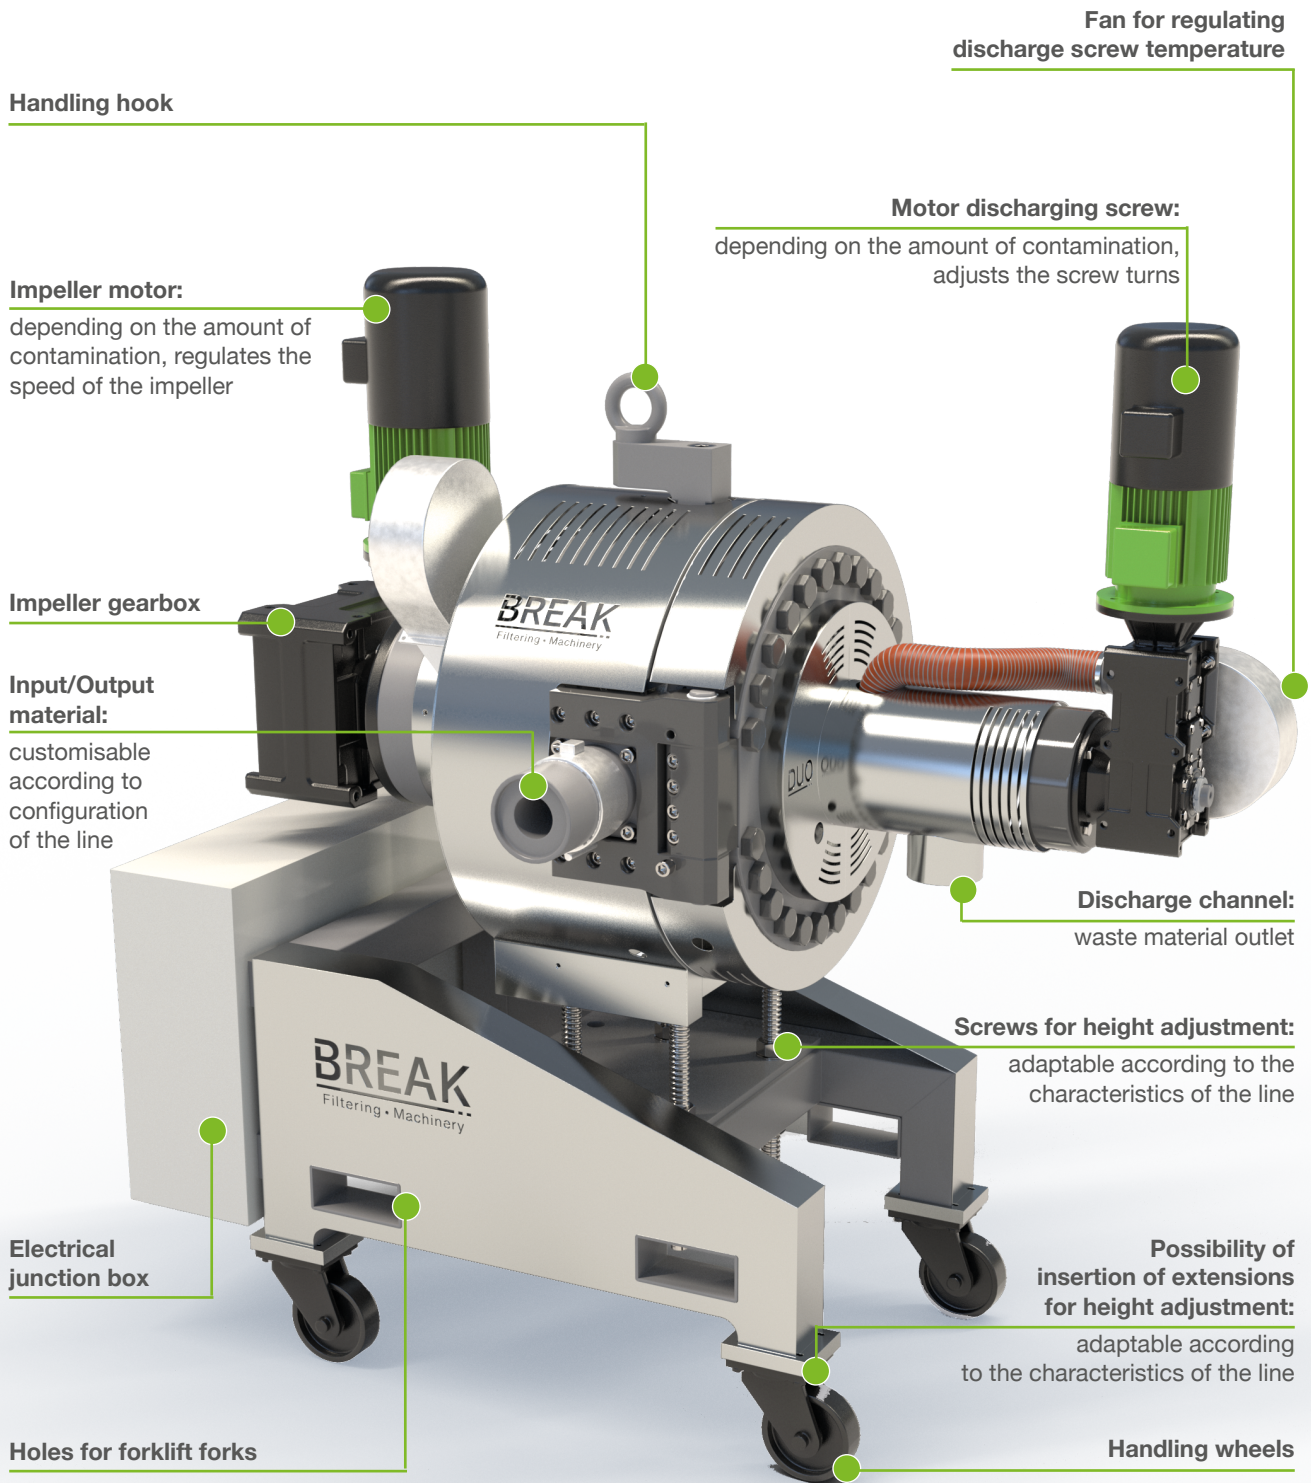

Handling hook

Impeller motor:
depending on the amount of contamination, regulates the speed of the impeller

Impeller gearbox

Input/Output material:
customisable according to configuration of the line

Electrical junction box

Holes for forklift forks

Fan for regulating discharge screw temperature

Motor discharging screw:
depending on the amount of contamination, adjusts the screw turns

Discharge channel:
waste material outlet

Screws for height adjustment:
adaptable according to the characteristics of the line


Possibility of insertion of extensions for height adjustment:
adaptable according to the characteristics of the line

Handling wheels

DUO: components



Discharging screw

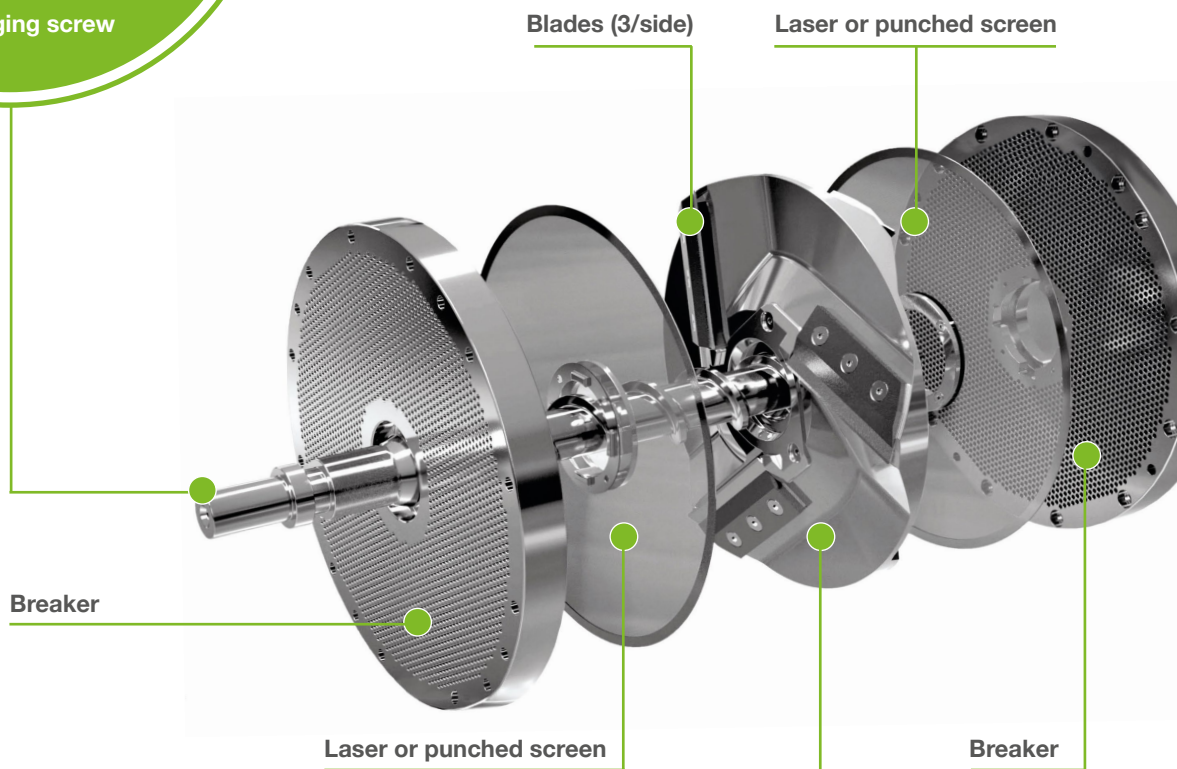


Blades (3/side)

Laser or punched screen

Breaker

Laser or punched screen

Breaker

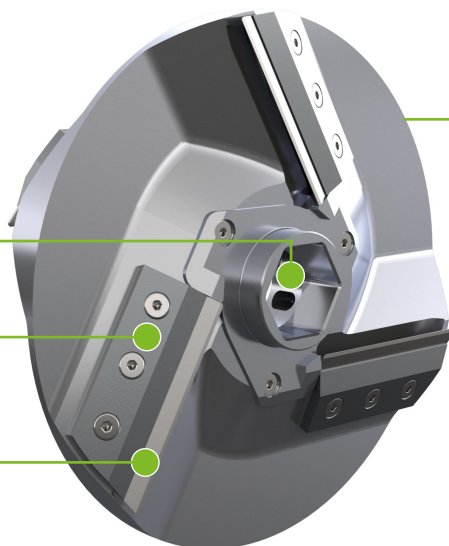

Scraping Impeller

Discharging screw
connection channel

Blade holder


Blade

Electrical cabinet and control panel

The control panel is equipped with an HMI that allows the operator to manage and dialogue with the machine in a simple and intuitive way.

The graphic interface is equipped with an alarm system to understand what is really happening on the machine; there are also graphs to allow an immediate visual reading of the phenomena that the various sensors detect.


The HMI makes it possible, via pages, to set the temperatures, operating mode (pressure/torque) and cleaning parameters for optimal operation of **DUO**.

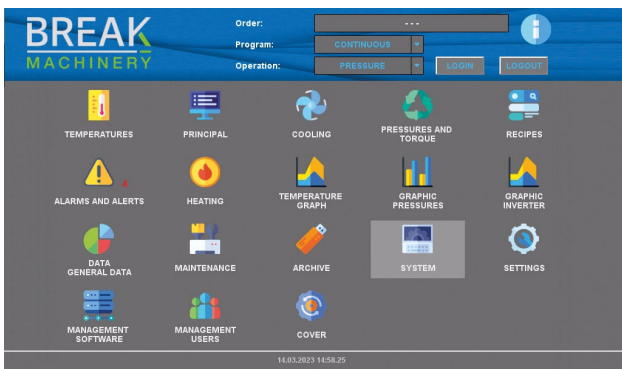


Function menu



Reading parameters

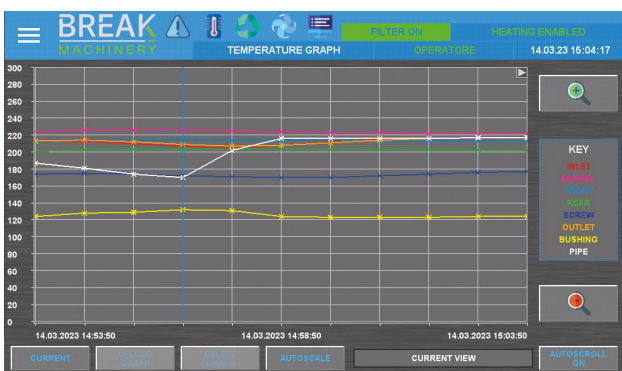

Temperature graph

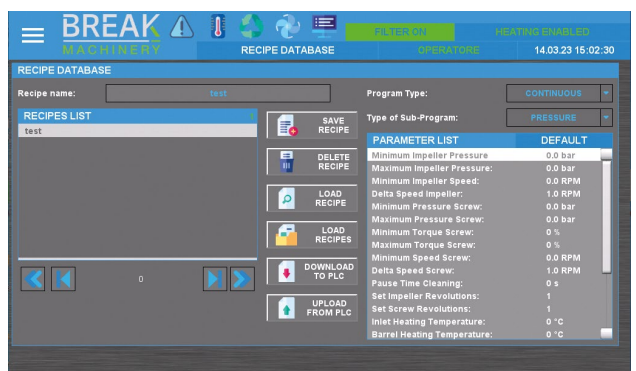


Recipe database

The Break system allows you to store a recipe book, which can be parameterised by the customer, so that he can quickly recall the data entered.


The PLC allows, via the OPC-UA protocol, to exchange input and output data with other PLCs, SCADA or management systems. The switchboard is equipped with a tele-management router, which allows the plant to be monitored even from remote; in this way Break can guarantee continuous and immediate assistance to the customer.

Screens

The laser screen is one of the key elements in the filtration process, which is why Break Machinery handles its production directly.

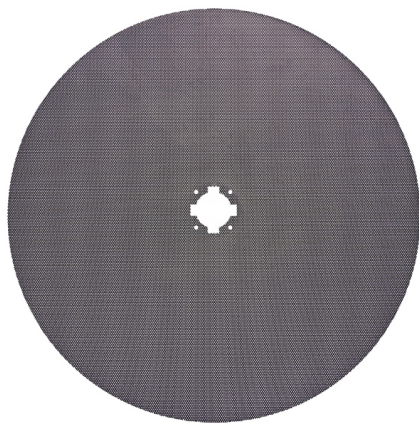

Punched screen DUO

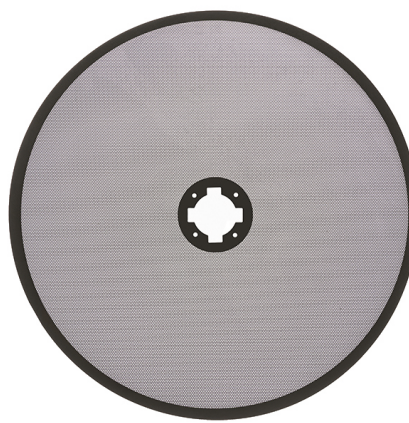

Laser screen DUO

■ Made in Italy


Each laser screen is produced in-house at Break Machinery's factories.

■ Quality

Made from special steels, on which specific heat treatments are carried out in order to ensure a longer filter life and the possibility of reuse, after cleaning in a pyrolytic oven.

■ Design

Conical bore technology allows working at lower pressures than cylindrical bore technologies.

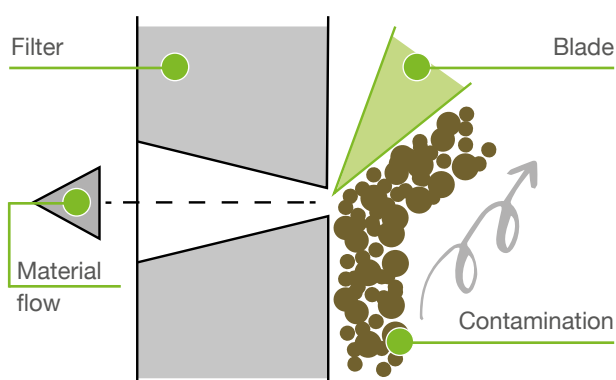

■ Robustness

Thanks to the thickness of the sheet metal, the depth of the heat treatment and the reinforced central and perimeter zones, the screen is robust and able to withstand various stresses.

■ Versatile

Available with filtrations from 60 to 2000 microns, to meet different customer needs.

Mod. DUO	Filtration
1400	from 60 to 2000 micron
1750	from 60 to 2000 micron
1750 Auto	from 60 to 2000 micron
2800	from 60 to 2000 micron
3500	from 60 to 2000 micron
5600 Twin	from 60 to 2000 micron
7000 Twin	from 60 to 2000 micron

Fields of application



DUO is compatible with all extrusion lines on the market and can be installed not only in recycling lines but also in film or sheet extrusion processes.




DUO is designed to filter many types of plastics such as PP, PE, HDPE, LDPE, PA, PS, PET, etc. and is capable of removing the most diverse types of contamination i.e. paper, aluminium, copper, wood, powders, rubber, silicone, etc.

The installation of **DUO** can result in:

- production increases of up to 20%;
- waste reduction of up to 50%;
- reduction in machine downtime of up to 75%.

Scraping operation

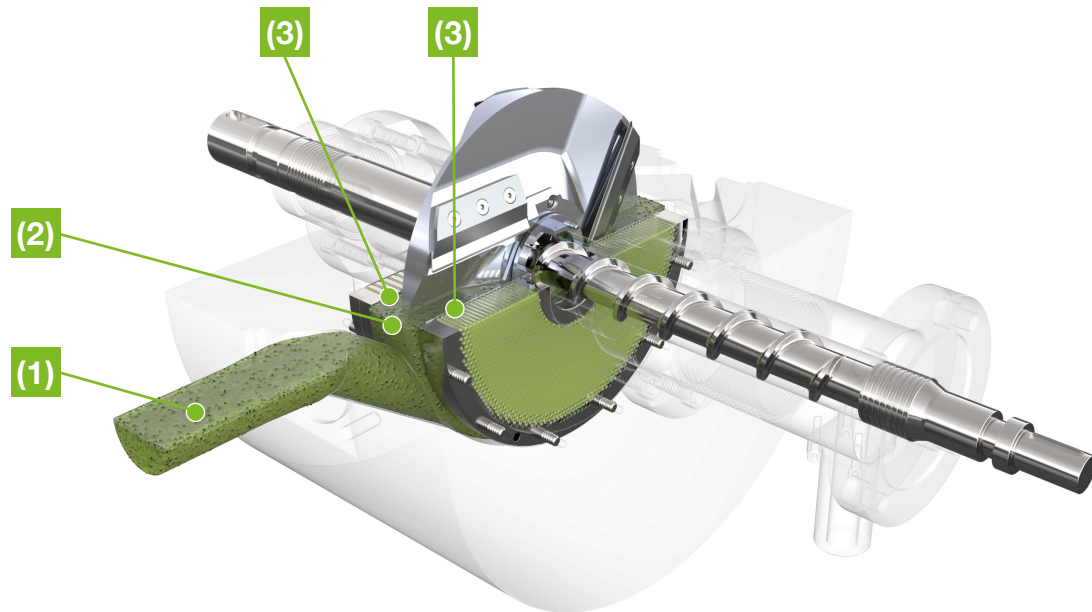


The molten plastic material **(1)** is conveyed into the filtration chamber **(2)** and goes through two screens **(3)** facing each other.

Between the two screens there is a scraper disc **(4)**, equipped with six blades, which rotates to remove the contamination from the screens by driving it into the disc itself **(5)**.


The core of the scraper receives the contamination, which is then transferred to the independent discharge screw **(6)** that ejects it.

The plastic material, filtered **(7)** by the two screens, then rejoins the output channel **(8)** to move on to the next process.

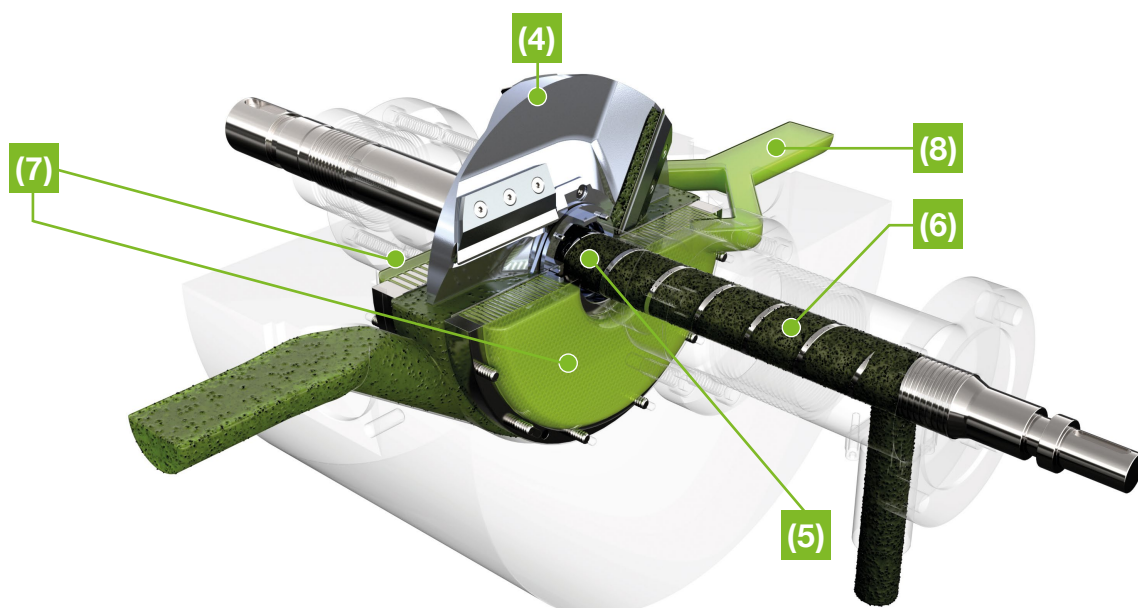


DUO 5600 and 7000 TWIN:

continuous production

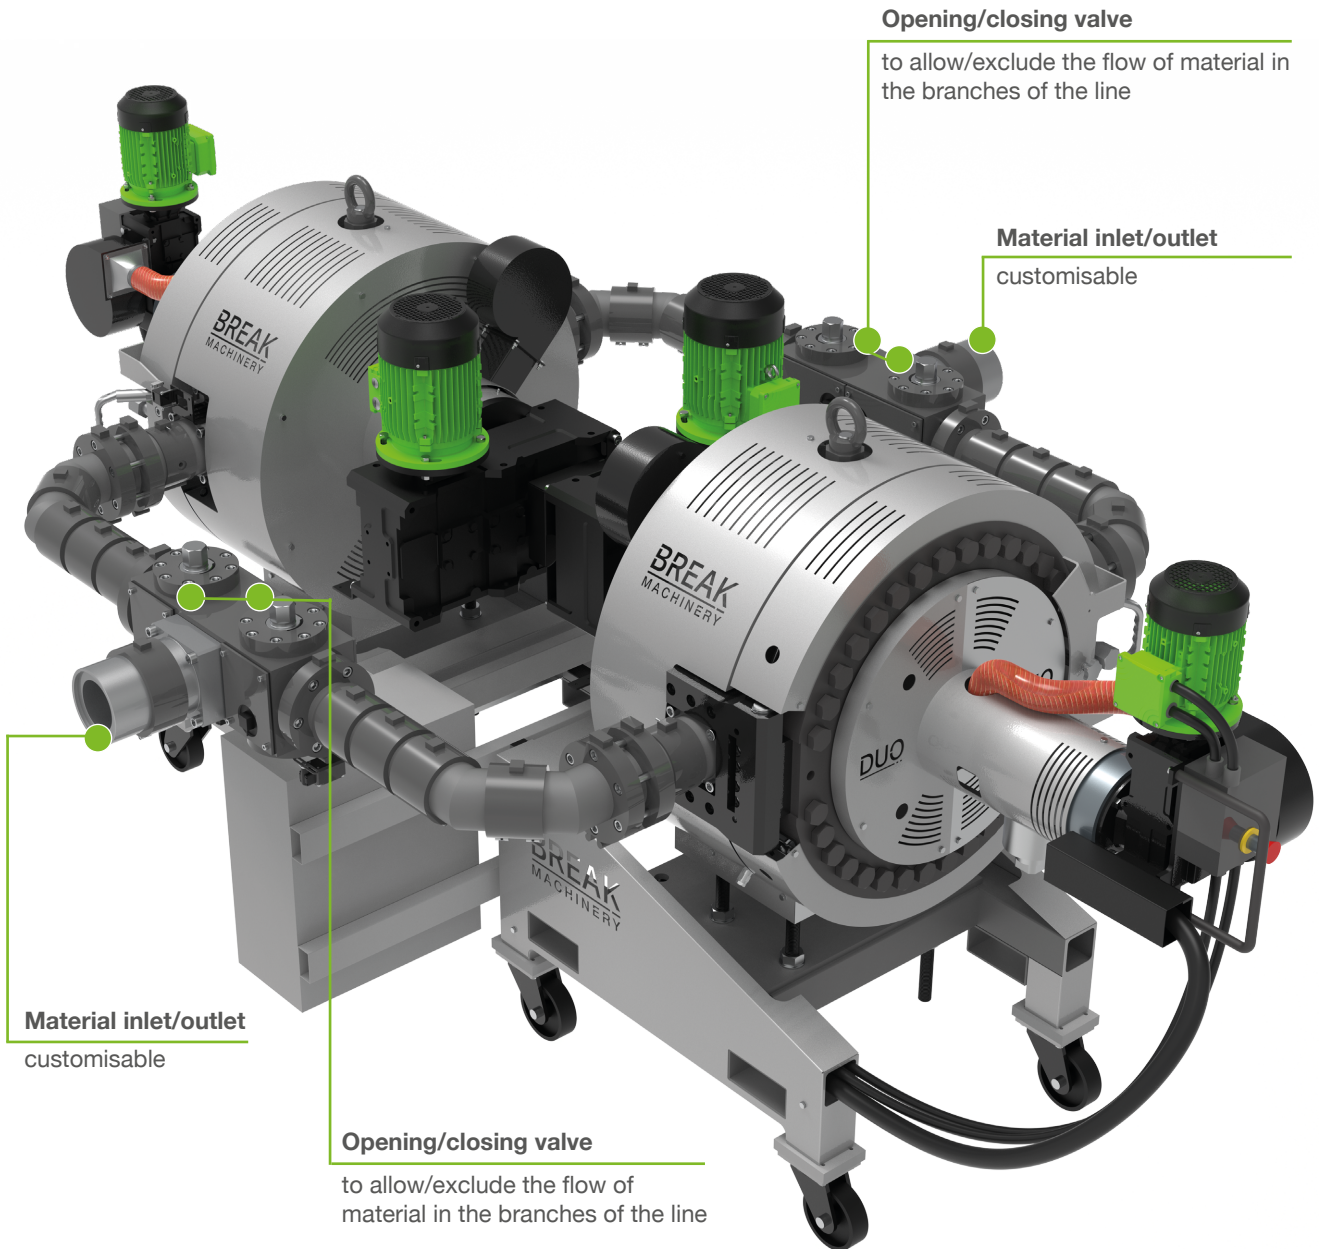

DUO	Filtering surface area [cm ²]	Heating zones	Max pressure [bar]	Max flow rate[kg/h] ¹	Filtration [µm]
5600 DS Twin	5694	14	350	10.000	60-2000
7000 DS Twin	7030	14	350	12.000	60-2000

(1) The flow rate depends on various factors: melt viscosity, filtration finess, type and percentage of contaminant, production line.

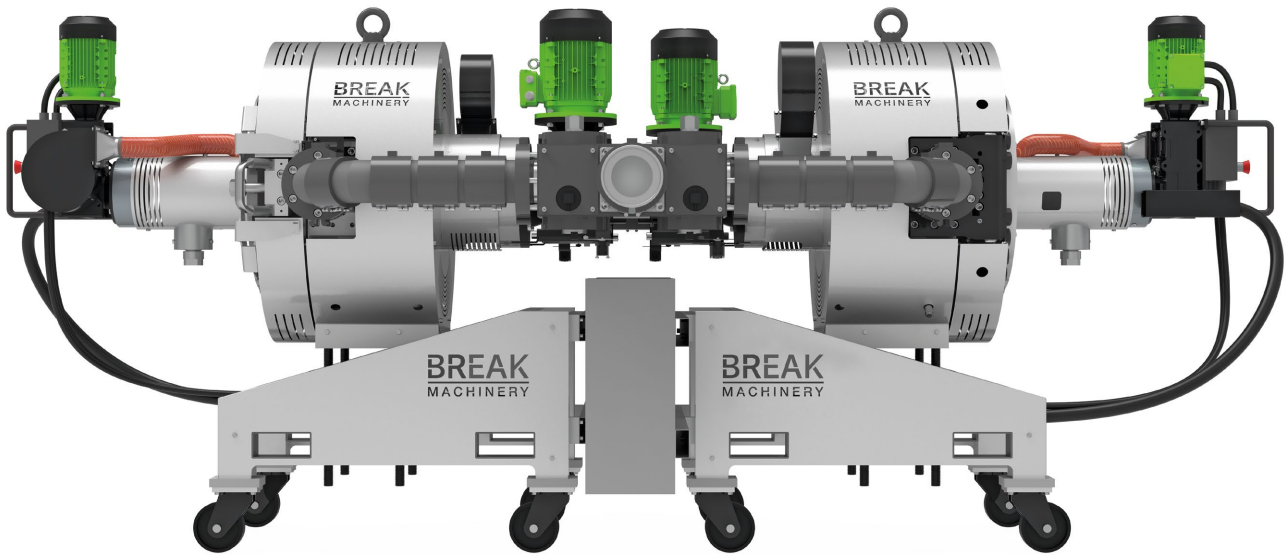


DUO 5600 and 7000 Twin, screen change without downtime


DUO 5600 and 7000 Twin consists of two **DUO**, screen changers, of the same size, running in parallel. When it becomes necessary to change the screen in the first machine, the flow of that branch of the line is stopped, and production remains active only on the other branch, connected to the second screen changer.

In this way, production is not interrupted and the screen can be changed, without having to stop the line. The same process is then carried out for changing the screen in the second machine.


DUO 5600 and 7000 Twin: operating mode

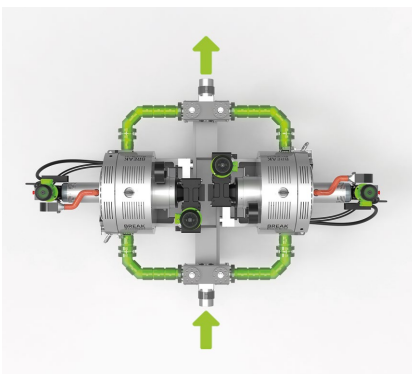

The flow of material passes through both channels.

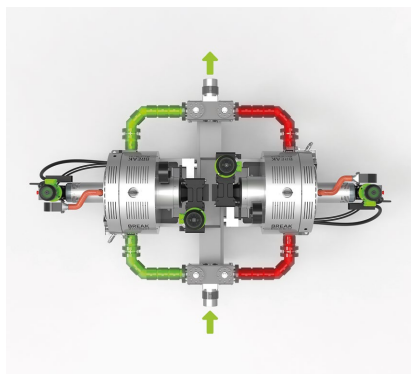

When cleaning the right screen changer, the flow of material only passes through the left channel.

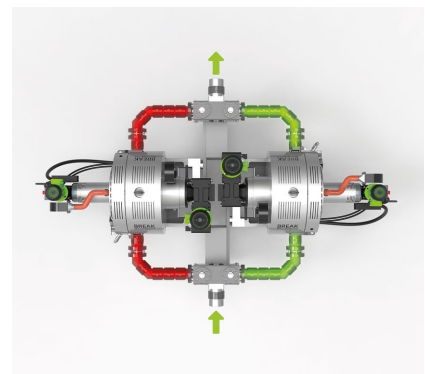

When cleaning the left screen changer, the flow of material only passes through the right channel.


Back-flushing operation

The back-flush mode is suitable for materials with a low percentage of contamination. Each machine can switch from scraping mode to back-flush mode simply by changing the kit of internal components.

Furthermore, in case of back-flush, no laser or punched screens are necessary anymore. Only metallic mesh screens.


The plastic material (1) is conveyed inside the filtration chamber (2) and goes through two metal mesh (3) facing each other, both of which are positioned between two breakers: one supporting (4) and a protective one (5).

Supporting the two protective breakers is a cleaner (6) which sucks up the contamination (7) settled on the metal mesh.

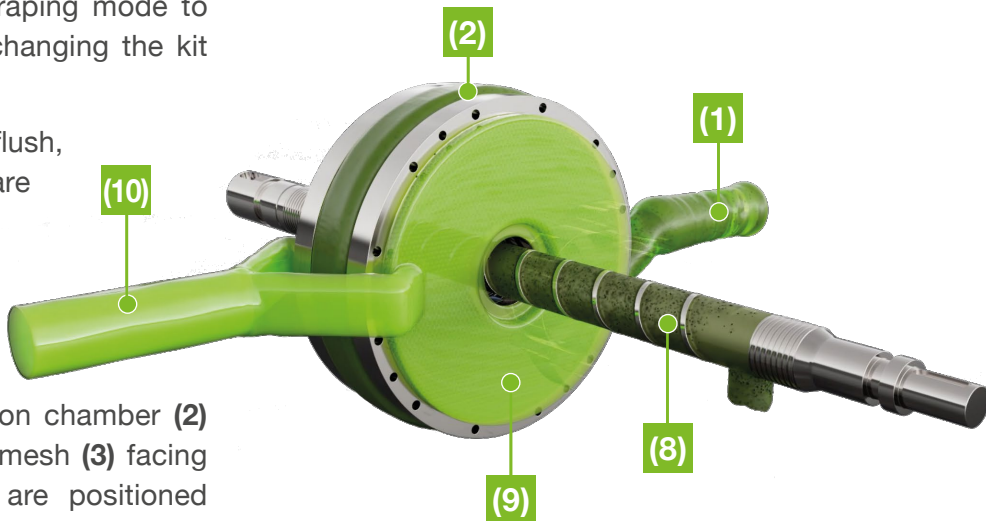

The centre of the cleaner is in communication with an independent discharge screw (8) that ejects the contaminated material.

The filtered melted material (9) then rejoins into the outlet channel (10) to pass to the next process.

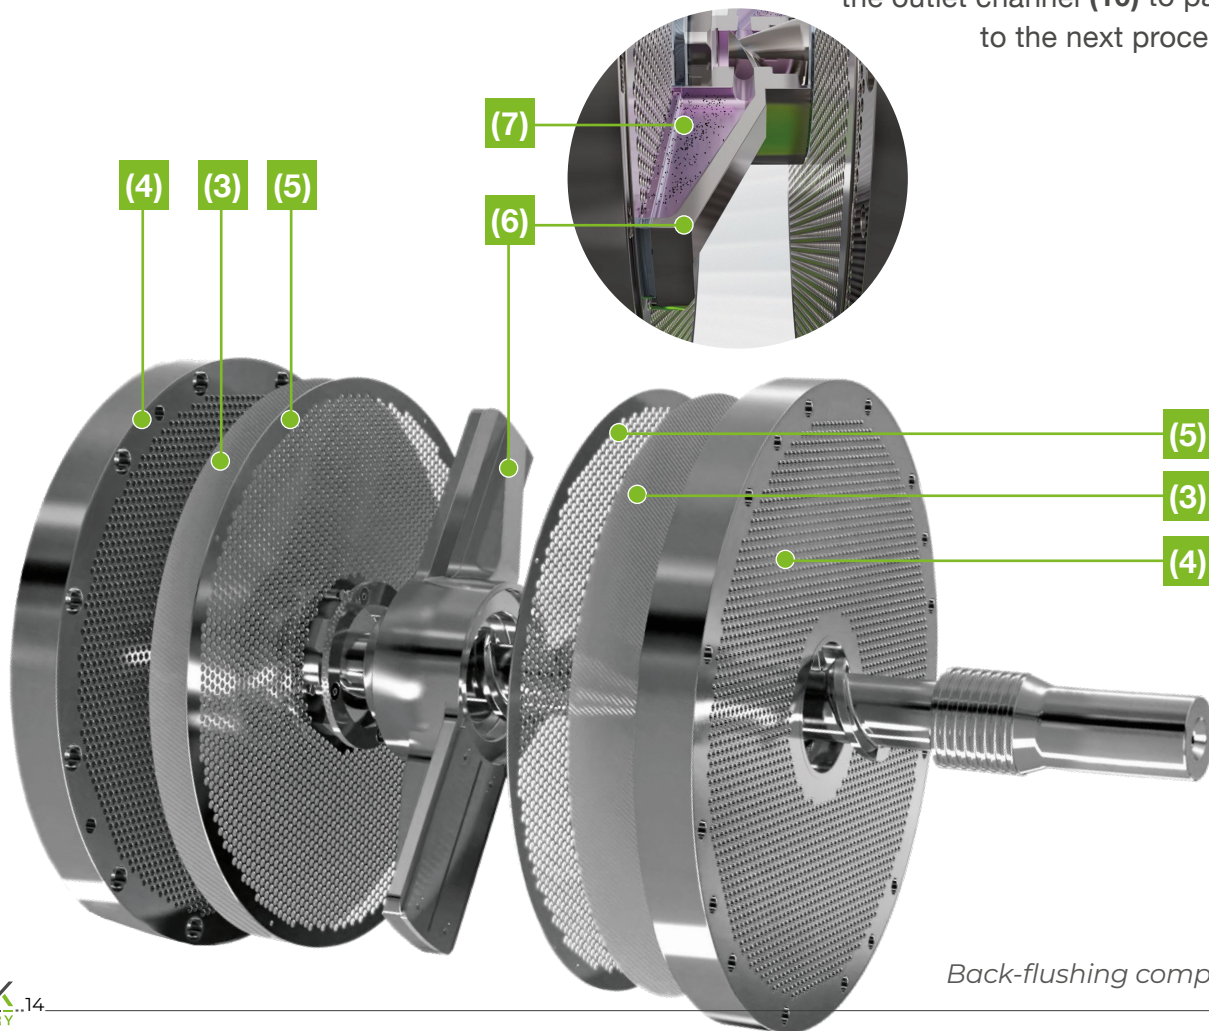

Back-flushing components

Automatic opening system


DUO is also available with an automatic opening system that makes opening and closing lid's operations easier, faster and safer.

This system consists of a threaded lid that screws directly onto the machine body, and by a drive which controls both the screwing and the translation of the lid.


These two movements occur simultaneously thanks to a mechanism and a special clutch that allows the screw and female thread to couple during the closing phase.

Operation is activated via a single selector switch located on the front of the **DUO**.

With this system the time required to open and close the lid is reduced, as it is no longer necessary to loosen and tighten the bolts manually; the operator's work is therefore easier and much safer.

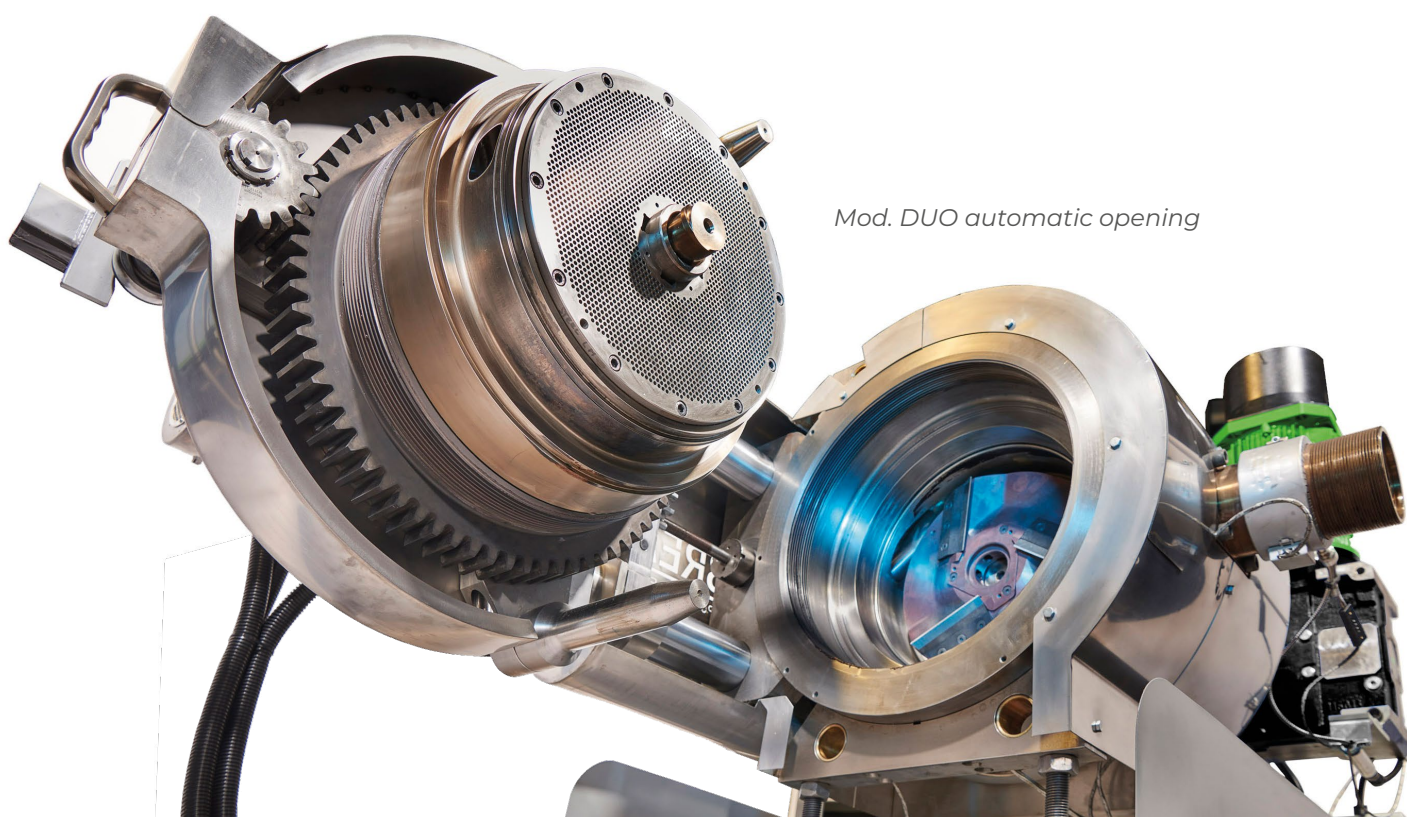

Mod. DUO automatic opening



**Environmental sustainability
is always at the core of our vision.**

BREAK MACHINERY s.r.l.

Via Martiri della Libertà, 7
35010 Grantorto (PD) Italy
Tel +39 049 9490350
info@breakmachinery.com
www.breakmachinery.com